

DMR is like making a phone call v2

[Talk Groups](#) and [Reflectors](#) is just like phone numbers.

Zones is your Address book, A to Z

Channels is the Frequency you wish to talk over.
This could be your local repeater, Simplex or Hotspot.

DMR Repeater is like having 2 phone lines. Line 1 and Line 2
Line 1 is called Slot 1
Line 2 is called Slot 2

DMR Simplex Hotspot has one phone line. Line 2 normally
Line 2 is called Slot 2

DMR Duplex Hotspot has two phone lines. Line 1 and Line 2
Line 1 is called Slot 1
Line 2 is called Slot 2

Talk Group is all the Phone numbers you wish to call.
TG9, TG310, TG91, TG23510 etc

Now for the fun part and making a call

So we will work a local DMR repeater and at this point we need to know -

1. What phone (DMR) network we will be using.
2. This could be Brandmeister, Phoenix, DMR+, or another provider.
3. The networks do not talk to other networks in general.
4. You need to know, do they use Talk Groups or Reflectors.
5. As a rule Talk Groups is on Line 1 (Slot 1) but some networks use Slot 2 also.
(Simplex / Duplex Hotspots can use Slot 2 for Reflectors or Talk Groups)
6. All Reflectors only work on Line 2 (Slot2)
7. You will also need to know what Color Code the Repeater is using.

In this next stage, I will do an example that will work on all Networks.

1. We need to know the Frequency of the repeater RX and TX
2. We need to know what Talk Groups it offers
3. Talk Group 9 is normally the default for local talk to all within range off the repeater.
4. We need to know the Repeaters Colour Code

First we need to add 9 to the Talk Group list (9 is the phone number)

Talk Groups is always added as a Group Call

No.	TG/DMR ID	Call Alert	Name	Call Type
1	9	None	9	Group Call
2	91	None	91	Group Call
3	2350	None	2350	Group Call
4	2351	None	2351	Group Call
5	2352	None	2352	Group Call
6	2353	None	2353	Group Call
7	2354	None	2354	Group Call
8	2355	None	2355	Group Call
9	2357	None	2357	Group Call
10	4000	None	4000 Group	Group Call
11	5000	None	5000	Group Call

Second we need to make a channel for the repeater.

We will be talking on Talk Group 9 for local chat on Slot 1

Channel Name: GB7BC-9-1

Receive Frequency: 439.65000
Transmit Frequency: 430.65000
Correct Frequency [Hz]: 0

Channel Type: D-Digital
Transmit Power: Low
Band Width: 12.5K
TX Permit: Different Color Code
Scan List: None
APRS Report Type: Off
Analog APRS PTT Mode: Off
Digital APRS PTT Mode: Off
Digital APRS Report Channel: 1
Exclude Channel From Roaming: Off
DMR MODE: Repeater

Digital settings:
Contact: 9
Radio ID: M6NBP Norman Brighton, UK
Color Code: 3
Slot: Slot1
Receive Group List: None
Encryption Group Id: Off
TX Interrupt: Off
Call Confirmation: Ranging
SMS Confirmation: Dup_call

You will see in the right hand box – Contact

This is where you point to the Talk Group you wish to talk on. (Phone Number)

Again in this example it is 9.

It can be any number you have added in the step above.

We also want it to be on Slot 1 (Line 1)

Name the Channel what is beset for you -

I have used the Repeater Name – 9 the Talk Group – 1 as it is on slot 1

I will skip over all the other setting.


You can use the ones as shown in the photo above.

Apart from the FREQ, Color Code,

Radio ID I will go over later in this document.

<http://tiny.cc/AnytoneDMR>

Now we need to add that Channel to your Address Book (Zone)

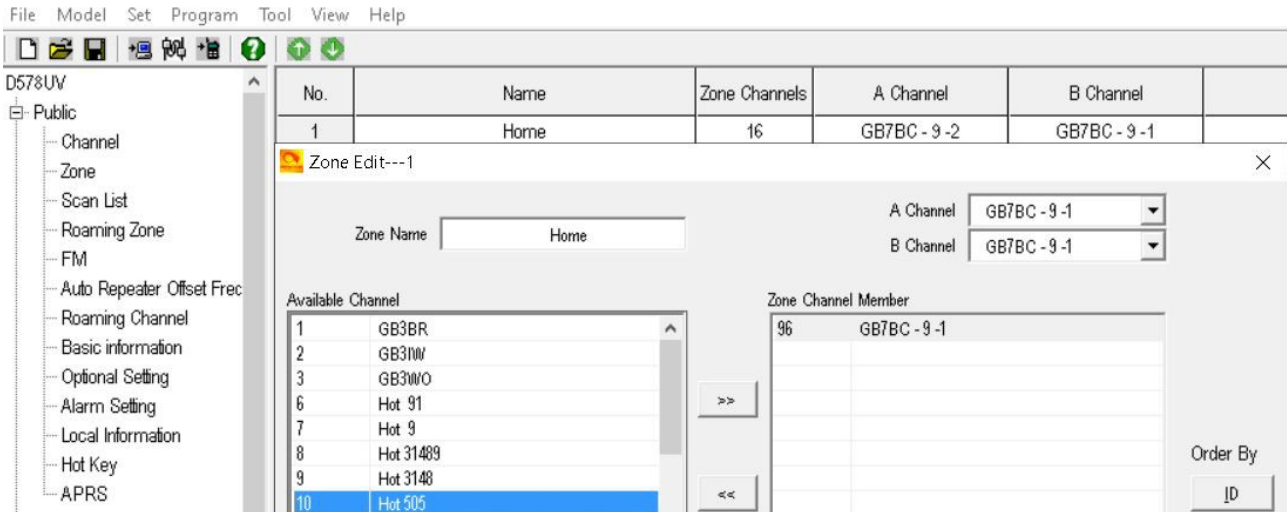

That is it.

Save the file “Codeplug” and Send to the Radio.

So now via the radio you can go to the Zone.

Select the channel that lets you talk on Slot 1 to Talk Group 9

When you PTT the radio you will be talking on Talk Group 9 via that repeater.

If you wish to talk on another Talk Group, you just follow the steps above.

Radio ID List.

This is your Personal Phone number. ([DMR ID Number](#)) ([USA ID Number](#))

It is made up off 7 digits

This is the ID number that is sent out every time you press the PTT.

Radio ID Name – Is what you want your Radio Called

WITHOUT a VALID ID number you CAN NOT use Ham Radio DMR Networks.

